



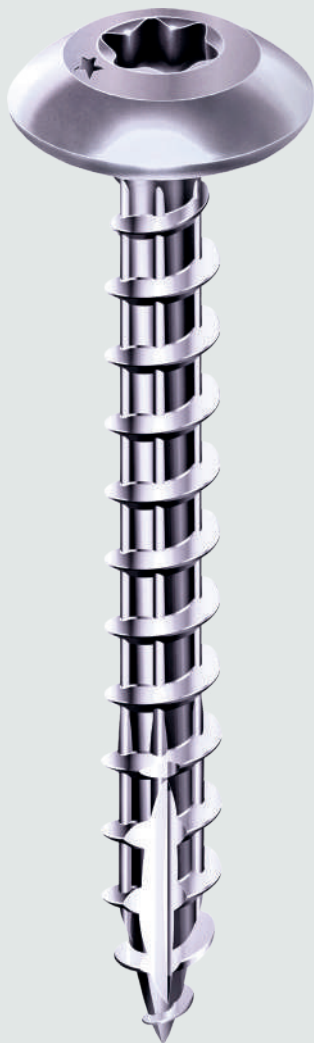

HINGE SCREWS

CYLINDRICAL HEAD STAR

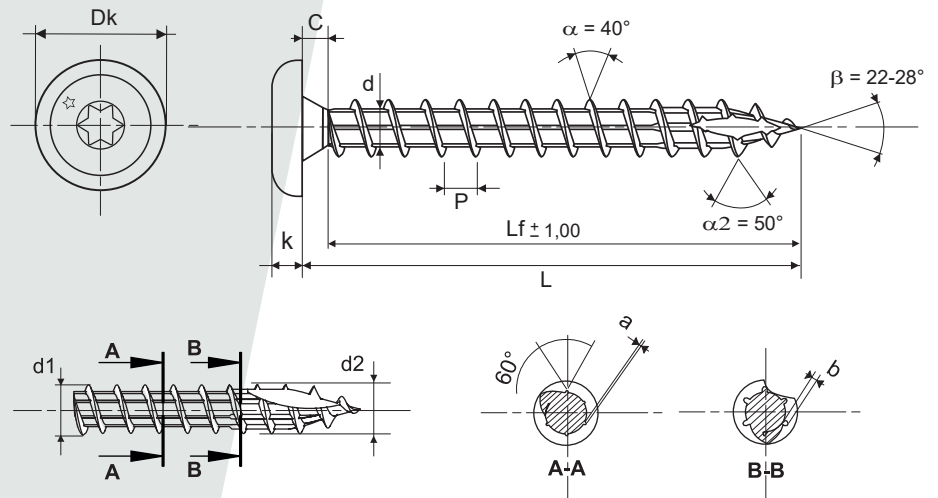

TECHNICAL CHARACTERISTICS

	Ø 6	Ø 7
Head depth	2,10 / 2,50	2,10 / 2,50
Screw driver	T30	T30
Dk	13,87 / 14,55	13,87 / 14,55
C	1,00 / 2,50	1,00 / 2,50
k	3,00 / 3,40	3,00 / 3,40
d	3,65 / 4,10	4,10 / 4,60
P	3,50 ± 10%	3,70 ± 10%
d1	5,80 / 6,10	6,80 / 7,10
d2	6,05	7,05
a/b	0,22 / 0,45	0,25 / 0,48

All Ø	30/70
Tolerance	- 1,25

\ **A2 stainless steel**