




SCREWS FOR FRAME

COUNTERSUNK HEAD STAR



T

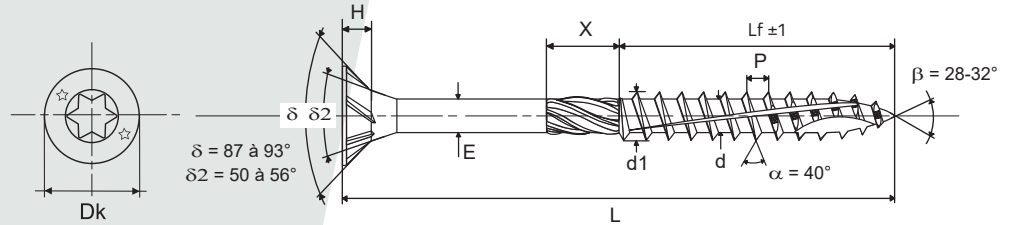

TECHNICAL CHARACTERISTICS

	Ø 6	Ø 8
Head depth	2,40 / 2,85	3,00 / 3,45
Screw driver	T30	T40
Dk	11,75 ± 0,25	14,50 ± 0,50
H	3,70	4,00
E	4,25	5,80
d	3,65 / 3,95	5,05 / 5,45
d1	5,80 / 6,20	7,75 / 8,25
P	4,50 ± 10%	5,20 ± 10%
X	11,00 / 13,00	11,00 / 13,00
Minimum breaking torque	11,00 Nm	25,00 Nm

Ø6-Ø8 Total length = 60/400

Tolerance L ± 1,00



EN 14592
+A1 2012

Zinc coated steel