




SCREWS FOR FRAME

WIDE FLAT HEAD STAR

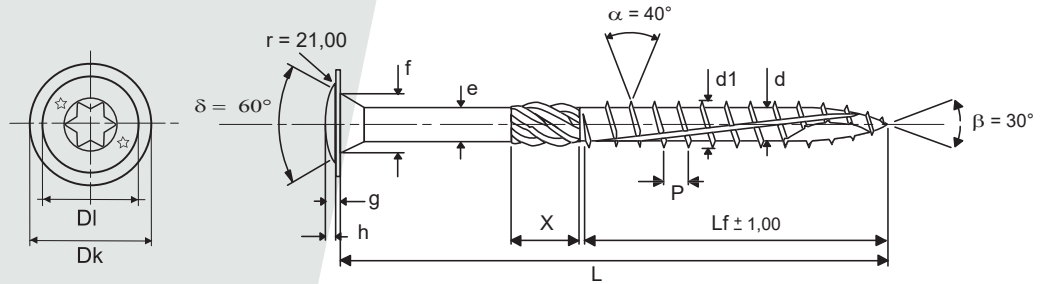

TECHNICAL CHARACTERISTICS

	Ø 6	Ø 8
Head depth	2,40 / 2,85	3,00 / 3,45
Screw driver	T30	T40
Dk	15,30 ± 0,80	21,50 ± 1,00
Dl	10,00	16,00
h	1,50	1,60
g	1,60 ± 0,20	1,80 ± 0,20
f	8,00	10,00
e	4,25	5,80
d	3,95 - 0,30	5,45 - 0,40
d1	6,00 ± 0,20	8,00 ± 0,25
P	4,50 ± 10 %	5,20 ± 10 %
X	11,00 / 13,00	11,00 / 13,00
Minimum breaking torque	11,00 Nm	25,00 Nm

Ø6-Ø8 Total length = 60/400

Tolérance L ± 1,00



EN 14592
+A1 2012

Zinc coated steel