
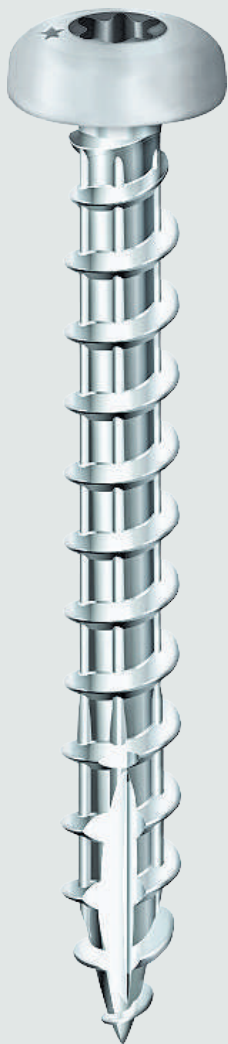
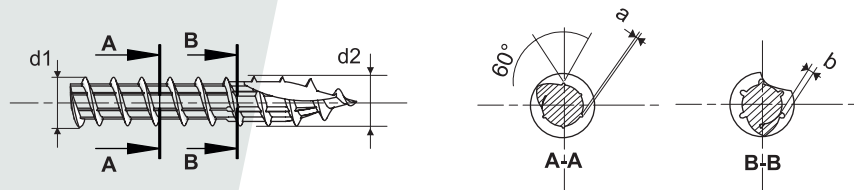


WOOD AND CHIPBOARD SCREWS

ROUNDED HEAD STAR

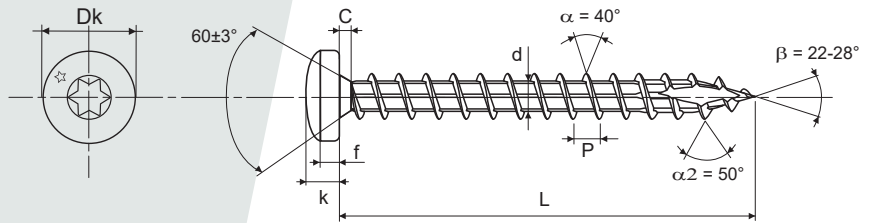

TECHNICAL CHARACTERISTICS

	Ø 3	Ø 3,5	Ø 4	Ø 4,5	Ø 5	Ø 6
Head depth	1,10 / 1,40	1,20 / 1,50	1,50 / 1,80	1,50 / 1,80	1,60 / 2,00	2,00 / 2,40
Screw driver	T10	T15	T20	T20	T25	T30
Dk	5,52 / 6,00	6,42 / 7,00	7,42 / 8,00	8,42 / 9,00	9,42 / 10,00	11,30 / 12,00
C	0,70 / 1,20	0,88 / 1,38	1,05 / 1,55	1,17 / 1,77	1,26 / 1,86	1,52 / 2,12
f	1,21	1,41	1,61	1,81	2,01	2,41
k	2,13 / 2,37	2,48 / 2,72	2,63 / 2,92	2,85 / 3,15	3,35 / 3,65	3,95 / 4,25
d	1,80 / 2,10	2,00 / 2,30	2,30 / 2,60	2,50 / 2,80	2,90 / 3,30	3,60 / 4,10
p	1,70 ± 10%	2,00 ± 10%	2,30 ± 10%	2,60 ± 10%	2,90 ± 10%	3,50 ± 10%
d1	2,95	3,45	3,95	4,45	4,95	5,95
d2	3,05	3,55	4,05	4,55	5,05	6,05
a/b	0,22 / 0,22	0,22 / 0,27	0,22 / 0,32	0,22 / 0,37	0,22 / 0,42	0,22 / 0,45
Minimum breaking torque	1,80 Nm	2,60 Nm	3,90 Nm	5,00 Nm	7,00 Nm	11,50 Nm

For ROCKET screws less than 25 mm, diameters d1 and d2 are identical.

All Ø	L = 10/16	20/30	35/80*
Tolerance	0 / -0,90	0 / -1,05	0 / -1,25

* except 5x60 = 0/-1,50 - 6x60 = 0/-1,50 - 6x80 = 0/-1,50

Zinc coated steel